



Thrutone

Fibre cement slates

The ever-economical and practical Thrutone fibre cement slate can be used for low pitch designs down to 15°, offering the designer and contractor more aesthetic and installation options.

Offering superb aesthetics with its smooth surface, square cut edges and Blue Black colour, Thrutone slate is a visually striking yet cost effective, low pitch solution.

- ✓ Low pitch options – down to 15° *
- ✓ Ideal for extensions, low pitch abutments and lean-tos
- ✓ Can be used for vertical cladding
- ✓ Gain extra credits with the highest environmental rating in the BRE Green Guide to Specification – A+ **
- ✓ Low carbon footprint – 13.0 CO₂e/m²
- ✓ Light weight, strong and durable (60 year design life)
- ✓ Thrutone fibre cement slates are fully recyclable





* Fully tested for weathertightness in accordance with CEN/TR 15601 standard and subject to exposure category and rafter length

** Element Ref: 812410008

Thrutone

Fibre cement slates

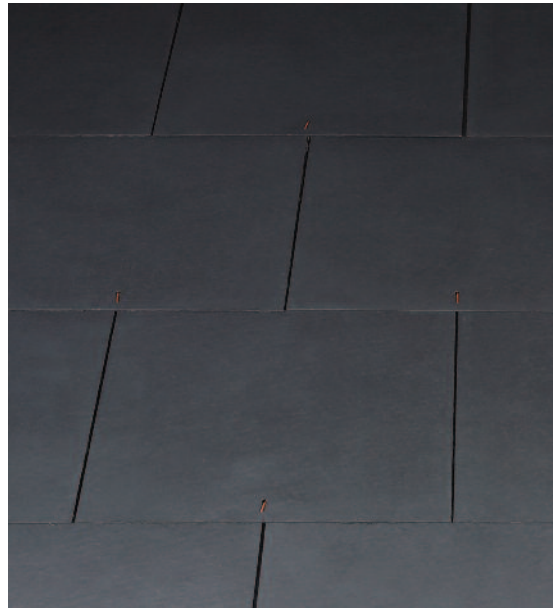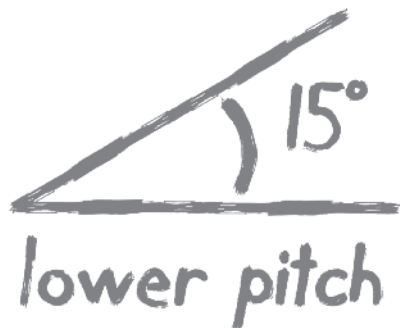

Technical data

Size of slate	600mm x 300mm
Roof Pitch @110mm lap for moderate and severe exposure	15° – 17.5° @ 4m max. rafter length 17.5° – 20° @ 6m max. rafter length
Batten gauge	245mm
Covering Capacity	13.6 slates / m ²
Weight of Slating (kg/m ²)	20.9 (0.20kN/m ²)
Battens required (lin.m/m ²)	4.08
Batten size recommended (fixed to BS 5534)	38 x 25mm for rafters/supports not exceeding 450mm centres 50 x 25mm for rafters/supports not exceeding 600mm centres
Slate nails (copper to BS1202-2)	30 x 2.65mm
Copper disc rivets	19mm dia. x 2mm stem, 19mm dia. base
Authority	BS EN 492

→ More

For the full range of fibre cement slates visit
www.marleyeternit.co.uk/slates

For comprehensive fixing details, see the 'Fibre Cement Slates Fixing Guide'
www.marleyeternit.co.uk/downloads

Call **ME** on 01283 722588
Email at info@marleyeternit.co.uk
Or visit www.marleyeternit.co.uk/slates



an **etex** company